



This handout is intended only as a guide and is based in part on the 2015 Minnesota Residential Code, Minnetrista City ordinances, and good building practice. While every attempt has been made to insure the correctness of this handout, no guarantees are made to its accuracy or completeness. Responsibility for compliance with applicable codes and ordinances falls on the owner or permit applicant. For specific questions regarding code requirements, refer to the applicable codes or contact your local Building Department.

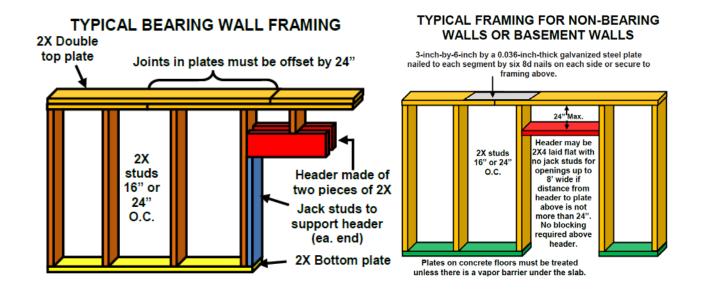


	SIZE, HEIGHT AND SPACING OF WOOD STUDS TABLE R602.3(5)										
			BEARING WAL	LS		NONBEAR	NG WALLS				
STUD SIZE	MAXIMUM MAXIMUM MAXIMUM MAXIMUM MAXIMUM MAXIMUM M										
2X4	10 24 16 - 24 14 24										
2X6	10	24	24	16	24	20	24				

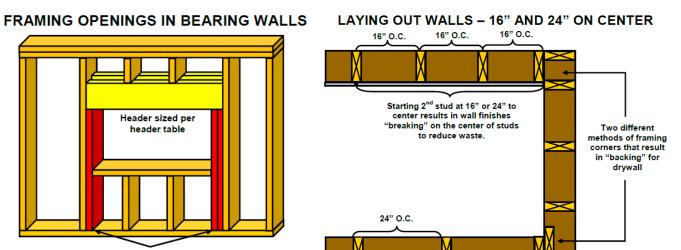

Single or double jack studs per header table

GIRDER AND HEADER SPANS FOR INTERIOR BEARING WALLS (IN FT/IN) TABLE R502.5(2) (#2Hem Fir or SPF)									
HEADERS AND	SIZE	BUILDING WIDTH (FT)							
GIRDERS		20	24	28	32				
SUPPORTING		SPAN (JACK	SPAN (JACK	SPAN (JACK	SPAN (JACK				
		STUDS)	STUDS)	STUDS)	STUDS)				
One floor only	2-2X4	3-1 (1)	2-11 (1)	2-8 (1)	2-7 (1)				
	2-2X6	4-6 (1)	4-3 (1)	3-11 (1)	3-9 (1)				
	2-2X8	9-1 (1)	5-4 (1)	5-0 (2)	4-9 (2)				
	2-2X10	7-0 (2)	6-7 (2)	6-1 (2)	5-9 (2)				
	2-2X12	8-1 (2)	7-7 (2)	7-0 (2)	6-7 (2)				
	3-2X8	7-2 (1)	6-9 (1)	6-3 (1)	5-11 (2)				
	3-2X10	8-9 (1)	8-2 (1)	7-7 (2)	7-2 (2)				
	3-2X12	10-2 (2)	9-6 (2)	8-10 (2)	8-3 (2)				
	4-2X8	9-0 (1)	8-3 (1)	7-8 (1)	7-3 (1)				
	4-2X10	10-1 (1)	9-5 (1)	9-0 (1)	8-4 (2)				
	4-2X12	11-9 (1)	10-11 (2)	10-2 (2)	9-8 (2)				
Two floors	2-2X4	2-2 (1)	2-0 (1)	1-10 (1)	1-9 (1)				
	2-2X6	3-2 (2)	3-0 (2)	2-9 (2)	2-7 (2)				
	2-2X8	4-1 (2)	3-10 (2)	3-6 (2)	3-4 (2)				
	2-2X10	4-11 (2)	4-7 (2)	4-3 (2)	4-1 (3)				
	2-2X12	5-9 (2)	5-5 (3)	5-0 (3)	4-9 (3)				
	3-2X8	5-1 (2)	4-9 (2)	4-5 (2)	4-2 (2)				
	3-2X10	6-2 (2)	5-9 (2)	5-4 (2)	5-1 (2)				
	3-2X12	7-2 (2)	6-9 (2)	6-3 (2)	5-11 (3)				
	4-2X8	6-1 (1)	5-8 (2)	5-3 (2)	5-0 (2)				
	4-2X10	7-2 (2)	6-8 (2)	6-2 (2)	5-10 (2)				
	4-2X12	8-4 (2)	7-9 (2)	7-2 (2)	6-10 (2)				


OIDDED AND LICADED CRANC FOR INTERIOR READING WALLS (IN FT/IN)

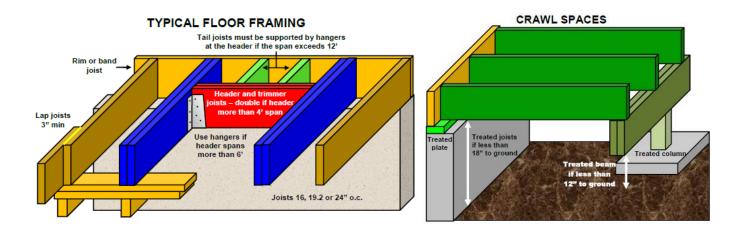


FLOOR JOIST SPANS #2 SPF TABLE R502.3.1(2)											
Joist spacing	Joist spacing 2X6 2X8 2X10 2X12										
16" O.C. 9-4 12-3 15-5 17-10											
19.2" O.C.	19.2" O.C. 8-9 11-6 14-1 16-3										
24" O.C.											

GIRDER SPANS AND HEADER SPANS FOR EXTERIOR BEARING WALLS - #2 HEM FIR OR SPF TABLE R502.5(1)									
GIRDERS AND		2	0	2	4	2	8	32	
HEADERS SUPPORTING	SIZE	Span	NJ	Span	NJ	Span	NJ	Span	NJ
	2-2×4	3-2	1	2-6	1	2-9	1	2-8	1
Roof and	2-2×4	<u> </u>	1	<u>4-5</u>	1	<u>4-1</u>	1	3-11	2
ceiling	2-2×8		2		2	5-2	2	4-11	2
Ŭ	2-2×10	7-3	2	6-9	2	6-3	2	5-11	2
	2-2×10	8-5	2	7-10	2	7-3	2	6-11	2
	3-2×8	7-5	<u> </u>	6-11	2	6-5	2	6-1	2
	3-2×10	9-1	2	8-6	2	7-10	2	7-5	2
	3-2×10	10-7	2	9-10	2	9-2	2	8-8	2
	4-2×8	8-4		7-11	- 1	7-5	-	7-1	1
	4-2×10	10-6	1	9-9	2	9-1	2	8-8	2
	4-2×12	12-2	2	11-5	2	10-7	2	10-0	2
	2-2×4	2-9	1	2-7	1	2-5	1	2-4	1
Roof, ceiling	2-2×6	4-1	1	3-10	2	3-7	2	3-5	2
and one	2-2×8	5-2	2	4-10	2	4-6	2	4-4	2
center-bearing	2-2×10	6-4	2	5-11	2	5-6	2	5-3	2
floor	2-2×12	7-4	2	6-11	2	6-5	2	6-1	3
	3-2×8	6-5	2	6-1	2	5-8	2	5-4	2
	3-2×10	7-11	2	7-5	2	6-11	2	6-7	2
	3-2×12	9-2	2	8-7	2	8-0	2	7-8	2
	4-2×8	7-5	1	7-0	1	6-6	1	6-3	2
	4-2×10	9-1	2	8-6	2	8-0	2	7-7	2
	4-2×12	10-7	2	9-11	2	9-3	2	8-10	2
	2-2×4	2-7	1	2-5	1	2-3	1	2-2	1
Roof, ceiling	2-2×6	3-10	2	3-7	2	3-4	2	3-2	2
and one	2-2×8	4-10	2	4-6	2	4-2	2	4-0	2
clear span floor	2-2×10	5-11	2	5-5	2	5-1	2	4-10	2
	2-2×12	6-10	2	6-5	3	5-11	3	5-8	3
	3-2×8	6-1	2	5-8	2	5-3	2	5-0	3
	3-2×10	7-5	2	6-11	2	6-5	2	6-1	2
	3-2×12	8-7	2	8-0	2	7-5	2	7-1	2
	4-2×8	7-0	1	6-6	2	6-1	2	5-9	2
	4-2×10	8-7	2	8-0	2	7-5	2	7-0	2

			-		-		-		-
	4-2×12	9-11	2	9-5	2	8-7	2	8-2	2
	2-2×4	2-6	1	2-4	1	2-2	1	2-0	1
Roof, ceiling	2-2×6	3-8	2	3-5	2	3-2	2	3-0	2
and	2-2×8	4-7	2	4-4	2	4-0	2	3-10	2
two center-	2-2×10	5-8	2	5-4	2	4-11	2	4-8	3
bearing floors	2-2×12	6-6	2	6-2	3	5-9	3	5-6	3
110013	3-2×8	5-9	2	5-5	2	5-1	2	4-10	2
	3-2×10	7-1	2	6-8	2	6-2	2	5-11	2
	3-2×12	8-2	2	7-8	2	7-2	2	6-10	3
	4-2×8	6-8	1	6-3	2	5-10	2	5-7	2
	4-2×10	8-2	2	7-8	2	7-2	2	6-10	2
	4-2×12	9-5	2	8-10	2	8-3	2	7-10	2
	2-2×4	2-0	1	1-10	1	1-8	1	1-7	2
Roof, ceiling,	2-2×6	3-0	2	2-10	2	2-7	2	2-5	2
and	2-2×8	3-10	2	3-7	2	3-4	2	3-2	3
two clear span floors	2-2×10	4-8	2	4-4	3	4-0	3	3-10	3
noors	2-2×12	5-5	3	5-1	3	4-8	3	4-5	3
	3-2×8	4-9	2	4-5	2	4-1	2	3-11	2
	3-2×10	5-10	2	5-5	2	5-0	2	4-9	3
	3-2×12	6-9	2	6-4	3	5-10	3	5-7	3
	4-2×8	5-6	2	5-2	2	4-9	2	4-6	3
	4-2×10	6-9	2	6-4	2	5-10	2	5-6	2
	4-2×12	7-9	2	7-3	2	6-9	2	6-5	3




FURRING VS. FRAMING

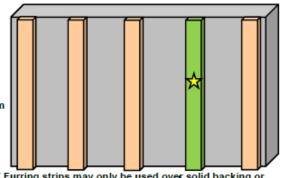

1 X Furring strips may only be used over solid backing or framing spaced not more than 24" o.c. Furring strips placed against a concrete or masonry wall must be treated unless a vapor retarder is placed between the wall and furring strips

ROOF FRAMING

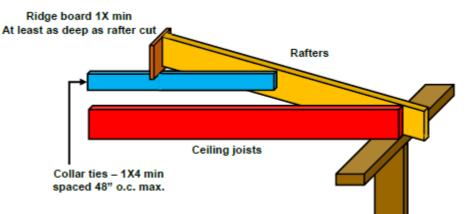

RAFTER SPANS FOR #2 HEM FIR AND SPF								
		2 x 4	2 x 6	2 x 8	2 x 10			
12" o.c.	Hem Fir	7-5	11-1	14-0	17-2			
	SPF	7-8	11-3	14-3	17-5			
16" o.c.	Hem Fir	6-7	9-7	12-2	14-10			
	SPF	6-8	9-9	12-4	15-1			
24" o.c.	Hem Fir	5-4	7-10	9-11	12-1			
	SPF	5-5	7-11	10-1	12-4			
			PANS FOR #2 HEM F STORAGE IN ATTIC	IR AND SPF				
		2 x 4	2 x 6	2 x 8	2 x 10			
12" o.c.	Hem Fir	11-7	18-2	24-0	26+			
	SPF	11-10	18-8	24-7	26+			
16" o.c.	Hem Fir	10-6	16-6	21-9	26+			
	SPF	10-9	16-11	22-4	26+			
24" o.c.	Hem Fir	9-2	14-5	18-6	22-7			
	SPF	9-5	14-9	18-9	22-11			

ENGINEERED LUMBER

This handout does not cover engineered lumber such as floor or roof trusses, I joists, glue-laminated members, structural composite lumber, and similar products. Refer to the manufacturer's installation instructions for further information.

OTHER FRAMING HANDOUTS

Other handouts are available on cutting, boring and notching framing, fireblocking, gypsum wall board, fasteners, and a host of other code requirements pertaining to wood framing.